


QX15 SPECIFICATIONS

MEASUREMENTS:

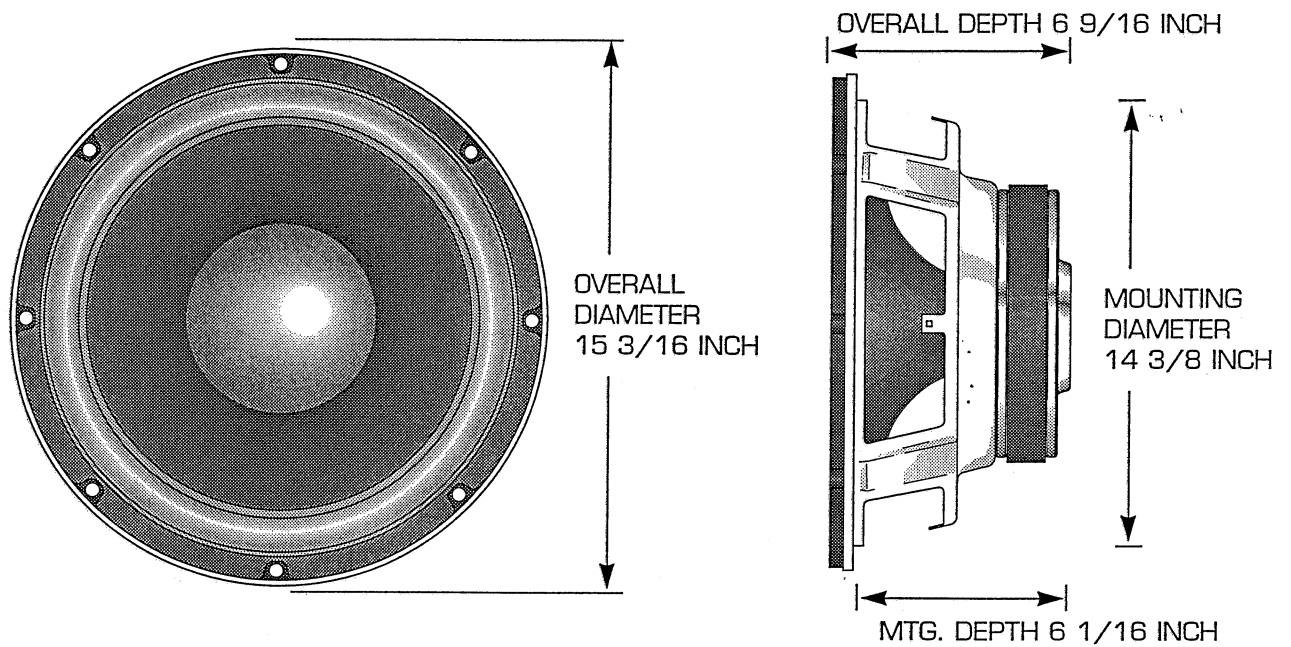


Revc (DC VC Res)	3.17Ω
Levc (Inductance @ 1KHz)	0.46mH
Fo (Res Freq)	27.3Hz
Sd (Piston Area)089m ²
BL (Flux* Length)	9.1TM
SPLo (SPL at 1w)	91.9dB
Qms (Mech Q)	3.99
Qes (Elec Q)	0.705
Qts (Total Q)	0.60
Vas (Acous Vol)	412.8liter(14.6 ft ³)
Cms (Compliance)	367μM/N

Mms (Total Mass)	107.3g
Mmd (Diaphragm Mass)	92.0g
Pe (Thermal Power Handling)	250W
Xmax (Linear Excursion)	6.2mm
Vc (Voice Coil Diameter)	2.5in
Magnet Weight	48oz
Vdd (Driver Displacement)	345in ³
Mounting Diameter	14 3/8in
Mounting Depth	6 1/16in


NOTE: Due to ongoing research and development, all features and specifications, effective 12/98, are subject to change without notice.

QX15 ENCLOSURE DATA

SEALED

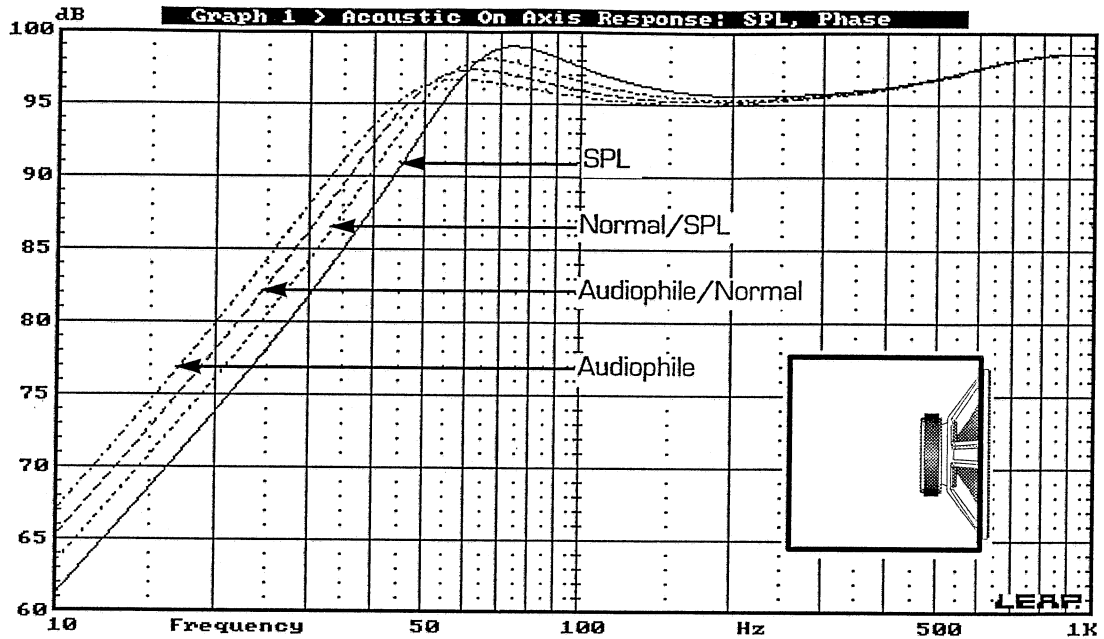


VENTED

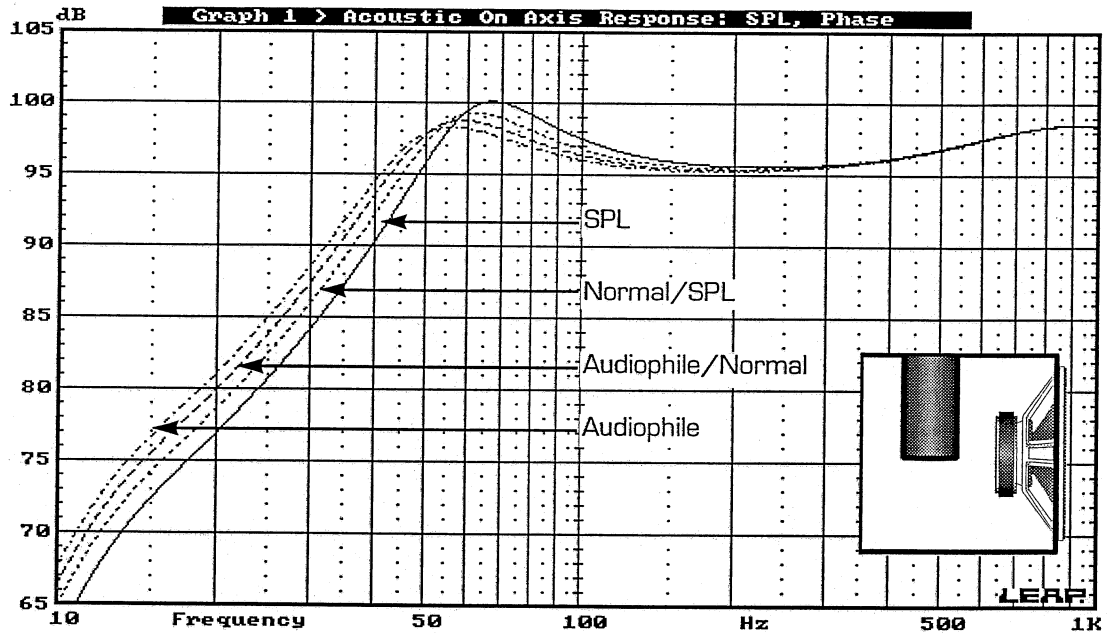

QX15 ENCLOSURE DATA

BAND-PASS

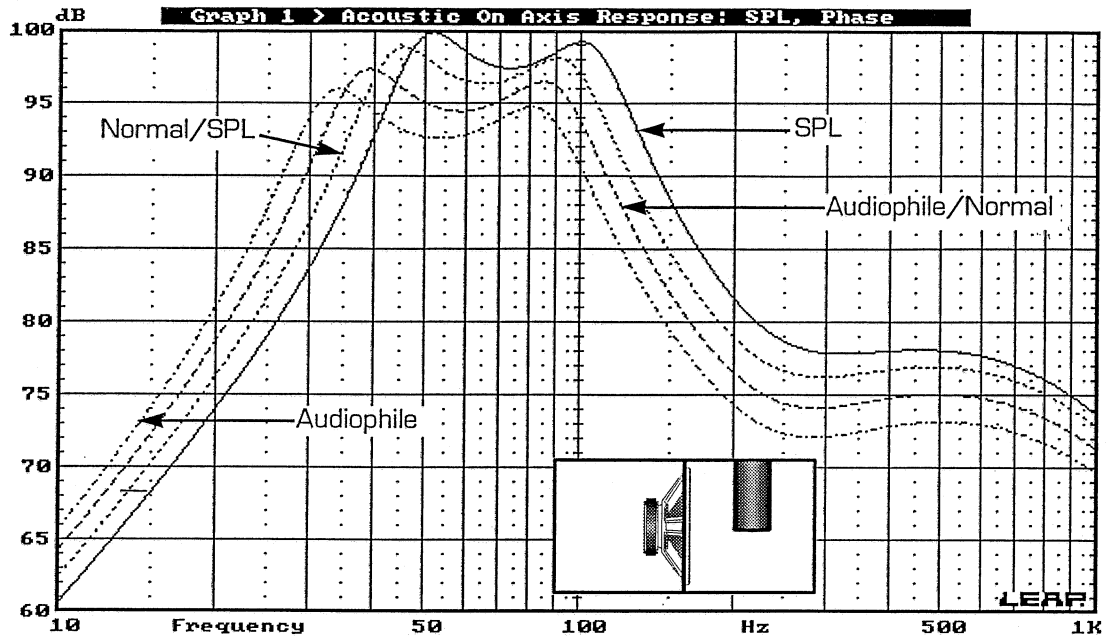

TRI-CHAMBER BAND-PASS

